

70mm Frame

- uPVC frame constructed with a chambered design
- □ Steel loaded for added structural performance
- □ Full perimeter multi-point locking system
- Screens standard on tilt-turn units
- 2 3/4" frame depth


70mm Frame	272/CL/272				180/CL/180			
Triple Glazed	U-Factor	R-Value	SHGC	VT	U-Factor	R-Value	SHGC	VT
Glass Only	0.13	7.7	0.35	0.57	0.13	7.7	0.56	0.70
Tilt / Turn	0.17	5.9	0.24	0.39	0.18	5.6	0.38	0.47
Picture	0.15	6.7	0.29	0.46	0.16	6.3	0.46	0.56
		_		-		-		
Lift and Slide	0.18	5.6	0.24	0.38	0.19	5.3	0.37	0.46

Note: Other glazing options available upon request

	Minimum	Maximum	Limitations	Notes	
Tilt / Turn	Width: 18" Height: 18"	Width: 60" Height: 100"	30 sq. ft.	Dual glazed units allow for 39.5 sq. ft.	
Picture	Width: 10" Height: 10"		50 sq. ft.	Max width and height depend on width/height aspect ratio and total sq. ft.	
Lift and Slide	Width: 72" Height: 84"	Width: 180" Height: 108"		Max width 167.5" at 96" height Doors over 96" will come knocked down	
Swing Doors		Width: Single Door: 42" French Door: 75" Height: 96" **	28 sq. ft.	Max weight rating of hinge system: 264 lbs per panel	
General: Common frame combinations 70 sq. ft. max. Height or width must be under 96" for shipping purposes					

General: Common frame combinations 70 sq. ft. max. Height or width must be under 96" for shipping purposes Requirements beyond the above limitations may be considered on a limited case by case basis.



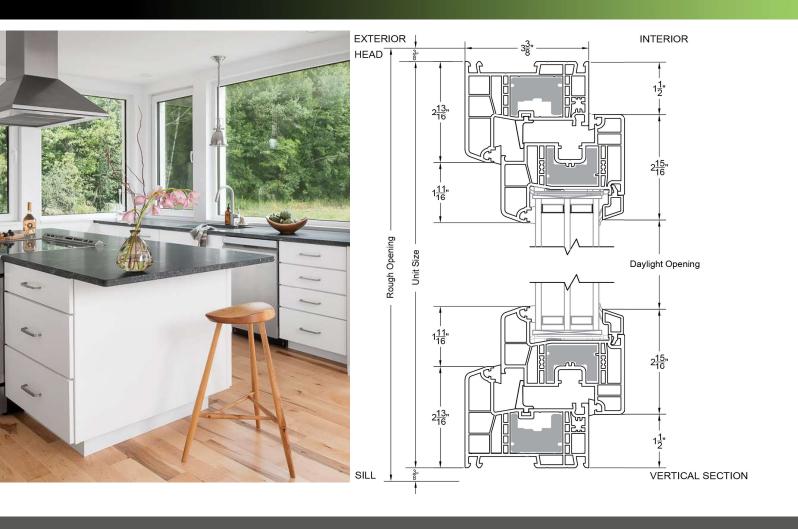

86mm Frame

- □ Fully reinforced polymer window profile system using a fiber composite material
- Six-chambered frame provides unmatched thermal insulation
- Continuous triple weather seal with compression seal
- □ Full perimeter multi-point locking system
- □ Screens standard on tilt-turn units
- □ 3 3/8" frame depth
- Passive House certified profiles available

86mm Frame	272/CL/272				180/CL/180			
Triple Glazed	U-Factor	R-Value	SHGC	VT	U-Factor	R-Value	SHGC	VT
Glass Only	0.13	7.7	0.35	0.57	0.13	7.7	0.56	0.70
Tilt / Turn	0.15	6.7	0.24	0.39	0.16	6.3	0.38	0.47
Picture	0.15	6.7	0.28	0.45	0.16	6.3	0.44	0.55
In-Swing Door	0.17	5.9	0.20	0.34	0.18	5.6	0.35	0.43
Out-Swing Door	0.18	5.6	0.20	0.34	0.18	5.6	0.35	0.43

Note: Other glazing options available upon request

	Minimum	Maximum	Limitations	Notes	
Tilt / Turn	Width: 18" Height: 18"	Width: 60" Height: 100"	30 sq. ft.	Dual glazed units allow for 39.5 sq. ft.	
Picture	Width: 10" Height: 10"		50 sq. ft.	Max width and height depend on width/height aspect ratio and total sq. ft.	
Lift and Slide	Width: 72" Height: 84"	Width: 180" Height: 108"		Max width 167.5" at 96" height Doors over 96" will come knocked down	
Swing Doors		Width: Single Door: 42" French Door: 75" Height: 96" **	28 sq. ft.	Max weight rating of hinge system: 264 lbs per panel	
General: Common frame combinations 70 sq. ft. max. Height or width must be under 96" for shipping purposes Requirements beyond the above limitations may be considered on a limited case by case basis.					